

2 Hour Rated Square Fire Damper Type EFDR

Product Features

- Manually or Electrically Operated
- 72°C Fusible Link Failsafe
- Minimum Size Ø100mm
- Maximum Size Ø400mm
- Depth vary from 350mm to 600mm
- Extended Shaft Op?on
- No Flanges
- Horizontal or Ver?cal
- Installa?on
- Inspec?on Port for Fusible Link

Application


- Duct Mounted
- SANS1932
- Hour Rated
- Combi Damper

Ordering Code

EFDR L () / Ø x d

EFDR L Round Fire Damper with 72°C Link
 (Q) Quadrant for Manual Opera?on
 (ES) Extended Shaft(24V) 24V Actuator (specify type)
 (220V) 220V Actuator (specify type)

Product Photos

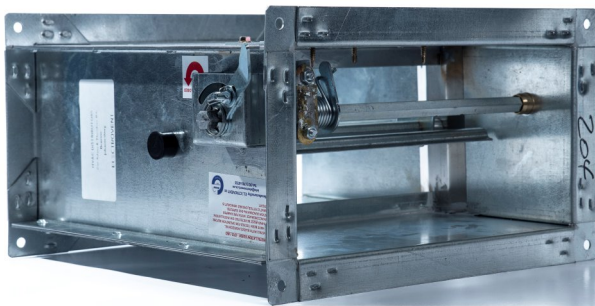

2 Hour Rated Round Fire Damper Type EFD-R

Product Features

- Manually or Electrically Operated
- 72°C Fusible Link Failsafe
- Minimum Size 100mm x 100mm
- Maximum Size 1200mm x 1200mm
- Depth vary from 350mm to 600mm
- Extended Shaft Option
- 30mm Flanges
- Horizontal or Vertical Installation
- Inspection Port for Fusible Link

Application

- Duct Mounted
- SANS193
- 2 Hour Rated
- Combi Damper

Ordering Code

EFD L () / w x h x d

EFD L Square Fire Damper with 72°C Link
(Q) Quadrant for Manual Operation
(ES) Extended Shaft
(24V) 24V Actuator (specify type)
(220V) 220V Actuator (specify type)

Product Photos

